



FIXTURE TYPE:	CCT TUNABLE INTEGRATED TUBE
NOTES:	
UPDATED DATE:	Feb, 2023

## CCT TUNABLE LED INTEGRATED TUBE



### PRODUCT OVERVIEW

Hilux new CCT tunable integrated tube, keep the advantages of the integrated tube: easy installation, meanwhile, add the CCT tunable function. You can choose different color temperature on the same lamp according to the preferences of light and the requirements of the use environment.

### KEY FEATURES

- CCT tunable.
- Full series: 4FT, 5FT, 6FT and 8FT
- High lumen efficient 130lm/w.
- Brackets for direct installation
- ETL, DLC5.1 listed.
- 5 years warranty.






### APPLICATION

- Office/school
- Subway & train station
- Supermarket, etc
- warehouse

## PERFORMANCE SUMMARY

Construction & Materials				
Diffuser	clear or frosted PC cover			
Housing	aluminum			
Finish	PC cover&aluminum body			
Environmental System				
Work Environment	Suitable for dry and damp location			
Operating Temperature	-20°C to 45°C			
Parameter				
CRI	>80			
Efficacy	130lm/w			
CCT	Single color:3000K,3500K,4000K,5000K,5700K,6500K 4CCT tunable:3000K-4000K-5000K-6500K			
Input Voltage	100-277Vac or 100-347Vac; 50/60HZ			
Size/Wattage/Certification/ Max connection	4FT	24W	DLC5.1, ETL,cETL	14PCS@120V;27PCS@220V
	4FT	30W	ETL,cETL	11PCS@120V;22PCS@220V
	5FT	40W	ETL,cETL	9PCS@120V;18PCS@220V
	6FT	48W	ETL,cETL	7PCS@120V;14PCS@220V
	8FT	60W	DLC5.1, ETL,cETL	6PCS@120V;12PCS@220V
	8FT	72W	DLC5.1, ETL,cETL	4PCS@120V;9PCS@220V
Base	Integrated base			

## INSTALLED OPTIONS


Image	Description	Note
	Metal clips for installation: 4FT/5FT:2PCS 6FT:3PCS;8FT:4PCS	Standard
	UL input cable,25CM	Standard
	Semaless middle hard connector	Standard
	Extend cascade cable: 1FT-10FT	Option
	UL input cable with switch	Option

## ORDERING GUIDE


Example: MC-INT4F-24XX

PRODUCT	SIZE	Wattage	First X	First X
INT	4F	<input type="text" value="30"/>	C	<input type="text" value="Color/CCT"/>
<b>INT</b> INTEGRATED	<b>4F 4FT</b> <b>5F 5FT</b> <b>6F 6FT</b> <b>8F 8FT</b>	24W 30W 40W 48W 60W 72W	<b>S</b> S= Stripy <b>C</b> C=Clear <b>M</b> M=Frosted	<b>A</b> 3000K <b>B</b> 3500K <b>C</b> 4000K <b>D</b> 5000K <b>H</b> 5700K <b>E</b> 6500K <b>M</b> 3000K-4000K-5000K-6500K

## CUT SHEET

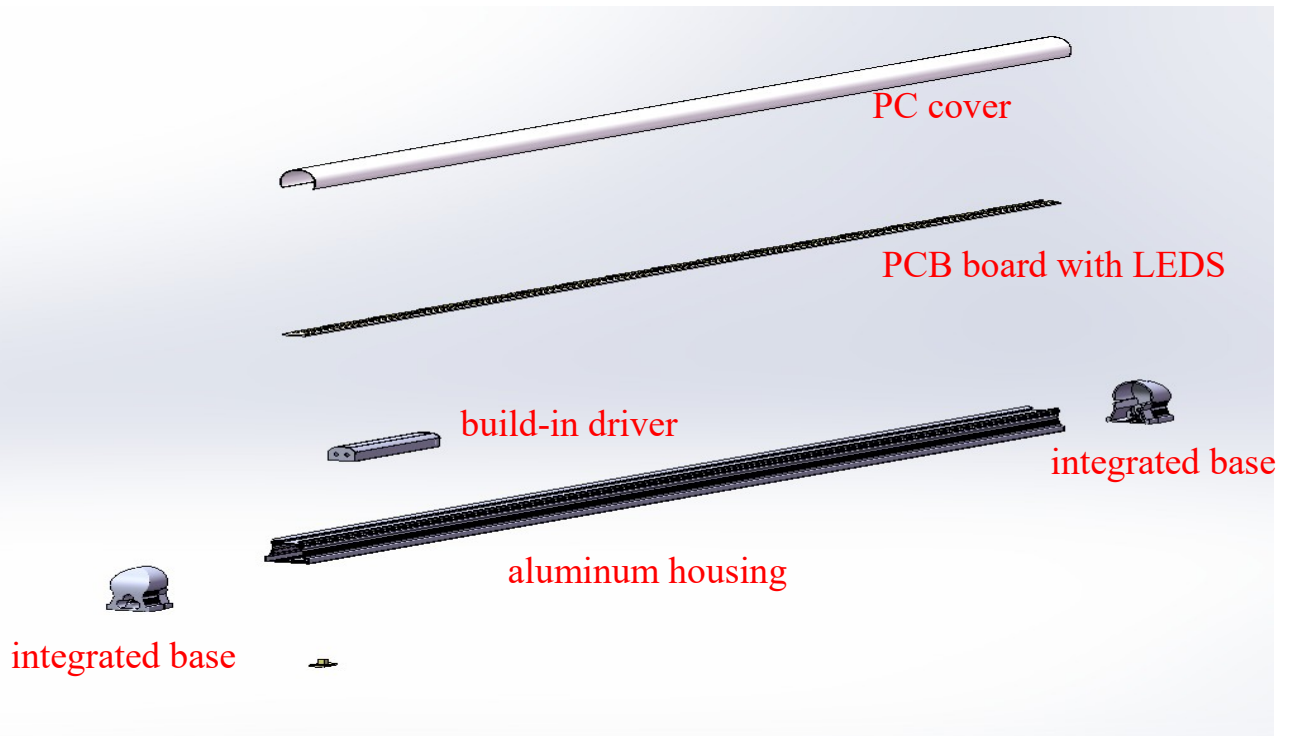


## DIMENSIONS (Unit: mm)

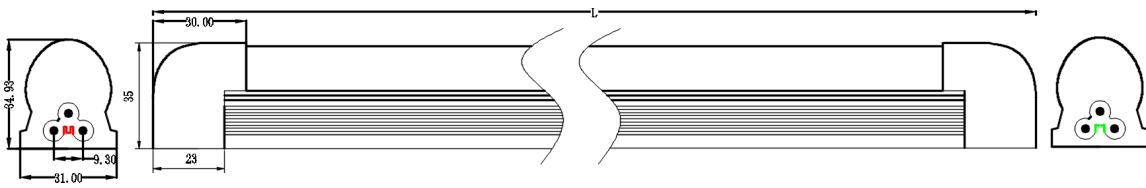

Length	Width	Height
1200mm (47.2")	31mm (1.22")	35mm (1.38")
1500mm ( 59.1" )	31mm (1.22")	35mm (1.38")
1800mm ( 70.9" )	31mm (1.22")	35mm (1.38")
2400mm ( 94.5" )	31mm (1.22")	35mm (1.38")

## PACKAGING INFORMATION

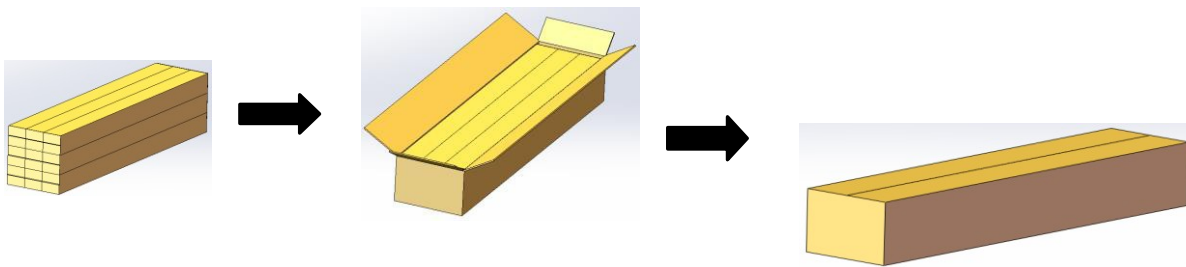

Size	Packing Detail				
	L(mm)	W(mm)	H(mm)	PC/CTN	GW(Kg)
4FT	1250	220	235	25PC	11.1kg
5FT	1520	220	235	25PC	12.5
6FT	1820	220	235	25PC	15.5
8FT	2445	220	190	20PC	13



0086-0075-23727896

[www.hiluxlight.com](http://www.hiluxlight.com)

[info@hiluxlight.com](mailto:info@hiluxlight.com)

ADD:Shenzhen,GuangDong Proviencie,China